

IoT SuperServer SYS-211TP-HPTR

X13 SuperEdge 2U4-Node UP rear I/O server with 24 SATA bays



Key Applications


Multi-Access Edge Computing (MEC), VRAN/ORAN for Telecom, Enterprise Edge,

Key Features

- Four **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following;;
- Single Socket E (LGA-4677) 5th/4th Gen Intel® Xeon® Scalable processors (per node);
- Intel® C741 Chipset;
- 8 DIMMs; Up to 2TB ECC DDR5-5600MT/s R-DIMM / R-DIMM 3DS (per node);
- 2 PCIe Gen5 x16 HHHL slot (per node);
- 2 NVMe M.2 2280 / 25110 (per node)
- Front hot-swappable 2.5” HDD/SSD tray (6 tray per node);
- 4 heavy duty 8cm PWM fans with optimal fan speed control (Per System);
- 1+1 Redundant 2000W AC Power Supplies (per system);
- Intel® X710 Dual port 10G SFP+ onboard;



Form Factor	2U Rackmount Enclosure: 438 x 88 x 730mm (17.25" x 3.5" x 28.75") Package: 526 x 250 x 965mm (20.7" x 9.8" x 38")
Processor	Single Socket E (LGA-4677) 5th Gen Intel® Xeon®4th Gen Intel® Xeon® Scalable processors Up to 60C/120T; Up to 300MB Cache
System Memory	Slot Count: 8 DIMM slots/1 Channels Max Memory (1DPC): Up to 2TB 5600MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 6 bays • 6 front hot-swap 2.5" SATA drive bays M.2: 2 M.2 PCIe 5.0 x4 NVMe slots (M-key 2280/22110/25110; VROC required for RAID)
Expansion Slots	Default • 2 PCIe 5.0 x16 HHHL slots
On-Board Devices	SATA: SATA (6Gbps) Network Connectivity: 2 SFP+ 10GbE with Intel® X710-BM2
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 SFP+ 10 GbE LAN ports (IPMI shared on LAN port 1) USB: 2 USB 3.2 Gen1 Type-A ports (rear) Video: 1 VGA port (Rear)

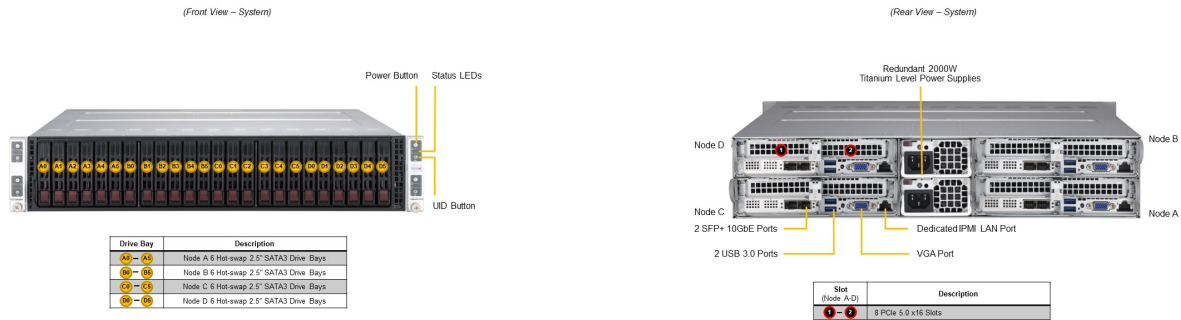

System Cooling Fans: Up to 4 heavy duty fans with optimal fan speed control 8cm Fan(s)
Air Shroud: 4 Air Shrouds

Power Supply 2x 2000W Redundant (1 + 1) Titanium Level (96%) power supplies

System BIOS BIOS Type: AMI 256MB SPI Flash
BIOS Features: RTC (Real Time Clock) Wakeup
SPI dual/quad speed support
Riser Card audio detection support
ACPI Power Management 6.4
SMBIOS 3.5 or later
PCI firmware 4.0
UEFI 2.9

Management SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

PC Health Monitoring CPU: Monitors for CPU Cores, Chipset Voltages, Memory
Fan: Fans with tachometer monitoring
Pulse Width Modulated (PWM) fan connectors
Status monitor for speed control
Temperature: CPU thermal trip support, PEPI
Monitoring for CPU and chassis environment

Dimensions and Weight Weight: Gross Weight: 90 lbs (40.8 kg)
Net Weight: 70 lbs (31.8 kg)
Available Color: Black front & silver body

Operating Environment RoHS Compliant
Operating Temperature: 0°C to 35°C (32°F to 95°F)
Non-operating Temperature: 0°C to 70°C (32°F to 158°F)
Operating Relative Humidity: 8% to 90% (non-condensing)
Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard [Super X13SET-PT](#)

Chassis CSE-217HQ+-R2K04BP4