

Mainstream SuperServer SYS-220P-C9R

2U Mainstream with 8 hot-swap SAS + 8 SATA bays and 5 PCIe 4.0 slots



Key Applications


High Performance Computing, Enterprise Server, Data Center Optimized, Database Processing and High Density Storage, Application-Optimized Solutions,

Key Features

- Dual sockets P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors;CPU TDP supports Up to 270W TDP;3 UPI up to 11.2 GT/s;
- Up to 4TB 3DS ECC RDIMM, DDR4-3200MHz, Up to 4TB 3DS ECC LRDIMM, DDR4-3200MHz ;- Up to 4TB Intel® Optane™ Persistent Memory 200 Series, DDR4-3200MHz, in 18 DIMM slots (P1-DIMMB2 and P2-DIMMB2 are reserved for Intel® Optane Persistent Memory 200 Series only);
- 4 PCIe 4.0 x16 Low Profile (LP);1 PCIe 4.0 x8 Low Profile (LP);* PCIe slot#1 is populated with 1x AOC-S3908L-H8IR-16DD-P to support 8x SAS drives;
- Dual Gigabit LAN with Intel® i350 Ethernet Controller;
- 3 heavy duty Hot-swappable 13.5K RPM Middle Cooling Fans with optimal fan speed control;1 air shroud;
- 1200W Redundant Power Supplies Titanium level 100-240Vac and 200-240 Vdc;
- 1 rear VGA, 1 Type A port, 2 COM Ports (1 front; 1 rear) and 6 USB ports (2 front USB 2.0 and 4 rear USB 3.0);



Form Factor	2U Rackmount Enclosure: 437 x 89 x 630mm (17.2" x 3.5" x 24.8") Package: 737 x 279 x 983mm (29" x 11" x 38.7")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 36C/72T; Up to 60MB Cache per CPU
System Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel® Optane™ persistent memory 200 series
Drive Bays Configuration	Default: Total 16 bays • 8 front hot-swap 2.5" SAS drive bays • 4 front hot-swap 2.5" SATA drive bays • 4 front hot-swap 2.5" NVMe*/SATA drive bays (*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details) Peripheral Bays: 1 5.25" DVD bay (optional)
Expansion Slots	Default • 4 PCIe 4.0 x16 LP slots • 1 PCIe 4.0 x8 LP slot
On-Board Devices	Network Connectivity: 2 RJ45 1GbE BMC: ASPEED AST2600 BMC
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 2.0 ports (front) 4 USB 3.0 ports (rear) Video: 1 VGA port DOM: 2 SuperDOM (Disk on Module) ports

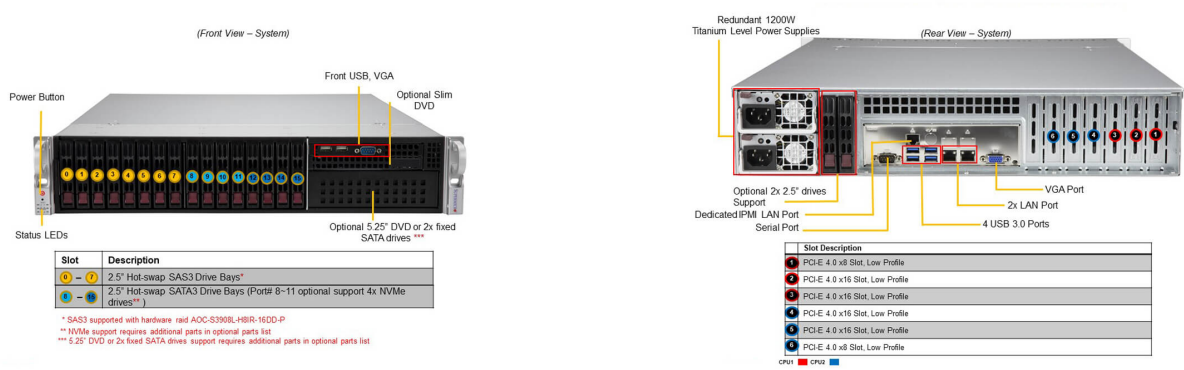

System Cooling	Fans: Up to 3 heavy duty fans with optimal fan speed control
Power Supply	1x 1200W Redundant Titanium Level (96%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 4+1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 63 lbs (28.8 kg) Net Weight: 38 lbs (17.4 kg) Available Color: Black
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	Super X12DPi-N6
Chassis	CSE-213BTS-R1K23LPBP3-1